

BURY COMPANIES, INC.

Full Service REBAR Supplier and Fabricator
 14210 Northdale Blvd.
 Rogers, MN 55374

(763) 428-4540
 (763) 428-4518 Fax
 info@burycompanies.com

**Fill out form on screen,
 print out and fax to (763) 428-4518 or
 save file and e-mail to info@burycompanies.com**

 Name of Company

 Job Name Purchase Order Number

 Address City State Zip

 Shipping Address or Will Call Requested Shipping Date


 Business Phone Fax Additional Phone Number

 Contact Person Information

Quantity	Rebar Diameter Size**	Straight Rebar		Standard Rebar Bends (Refer to Standard Bar Bends Chart)												
		Stock Lengths	Custom Cut*	Shape Number	Dimensions in Feet-Inches (00-00) <small>EXAMPLE: 4' 2" = 04-02</small> <small>MINIMUM DIMENSION: 4 INCHES</small>											
					A	B	C	D	E	F/R	G	H	J	K	O	

* Dimensions in Feet-Inches (00-00) EXAMPLE: 4' 2" = 04-02 MINIMUM DIMENSION: 4 INCHES
 ** Rebar diameter size in 1/8" increments (sizes 2 through 18)


Request a Quote or Place an Order
Print completed form and fax to (763) 428-4518 or save file and e-mail to info@burycompanies.com

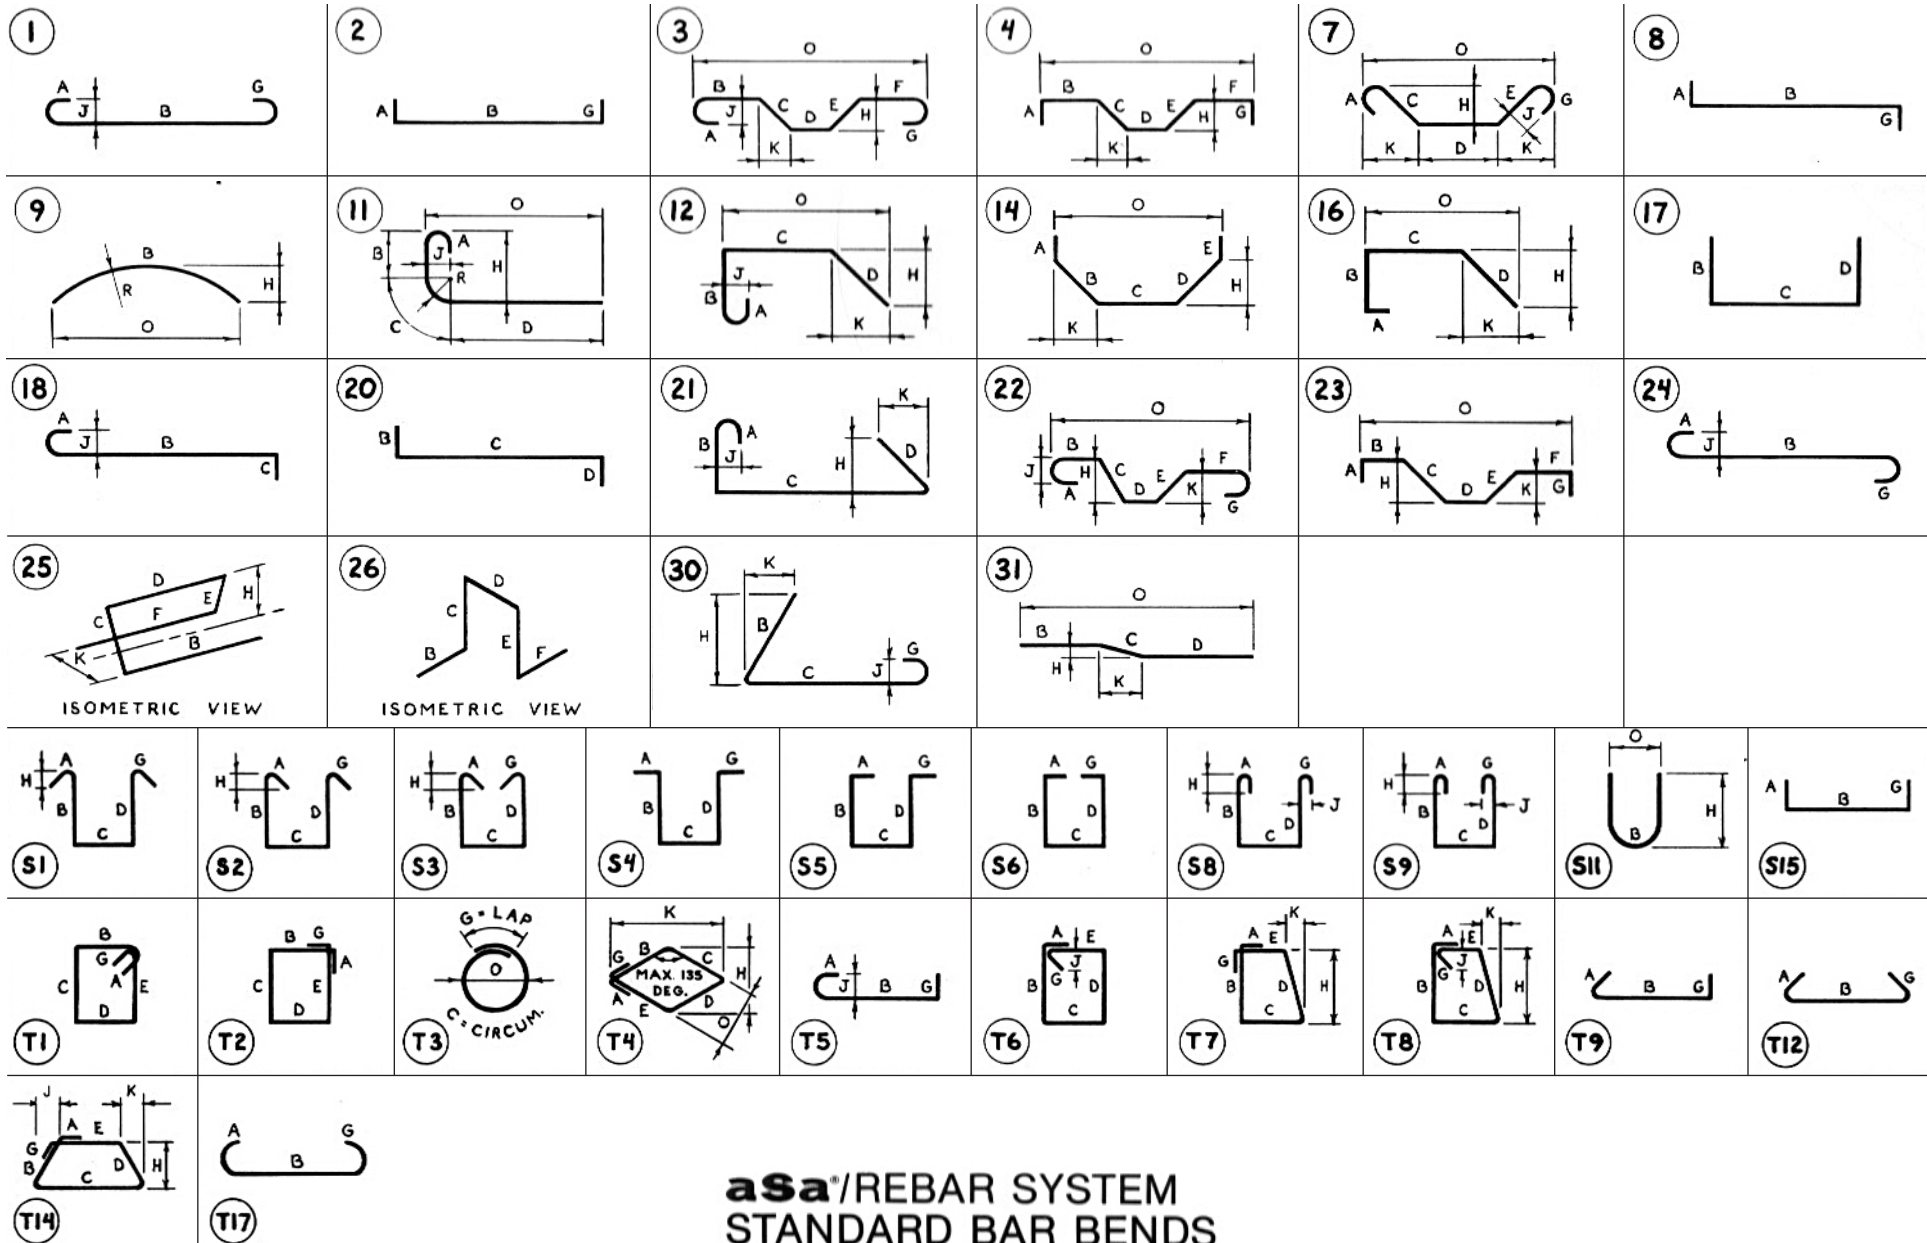

asa®/REBAR SYSTEM STANDARD BAR BENDS

NOTES:

1. aSa Standard Bar Bends include only Types 1-32, T1-T16, and S1-S15.
2. All dimensions are out-to-out of bar except "A" and "G" on standard 180° and 135° hooks.
3. "J" dimension on 180° hooks to be shown only where necessary to restrict hook size, otherwise standard hooks are to be used.
4. Where "J" is not shown, "J" will be kept equal to or less than "H" on truss bars. Where "J" can exceed "H", it should be shown.
5. "H" dimension stirrups to be shown where necessary to fit within concrete.

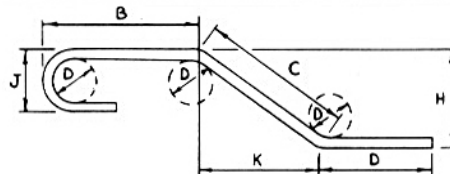

6. Unless otherwise noted, DIAMETER "D" is the same for all bends and hooks on a bar.
7. Where slope differs from 45° dimensions, "H" and "K" must be shown.
8. Where bars are to be bent more accurately than standard bending tolerances, bending dimensions which require closer fabrication should have limits indicated.
9. Figures in circles show types.
10. For recommended diameter "D", of bends, hooks, etc., see CRSI or ACI tables.
11. Type S1-S15, T1-T16 apply to bar sizes #3 through #8.
12. "J" dimension on type T14, T16 is assumed to be equal to "K" if not specified.