


Full Service REBAR Supplier and Fabricator
9901 73rd Street NE
Otsego, MN 55362

(763) 428-4540
(763) 428-4518 Fax
info@burycompanies.com

Name of Company				Job Name		Purchase Order Number	
Address		City	State	Zip	Shipping Address or ☐ Will Call		Requested Shipping Date
Business Phone	Fax	Additional Phone Number		Contact Person Information			

[illegible]


☐ Request a Quote or ☐ Place an Order
**Print completed form and fax to (763) 428-4518 or
 save file and e-mail to info@burympanies.com**

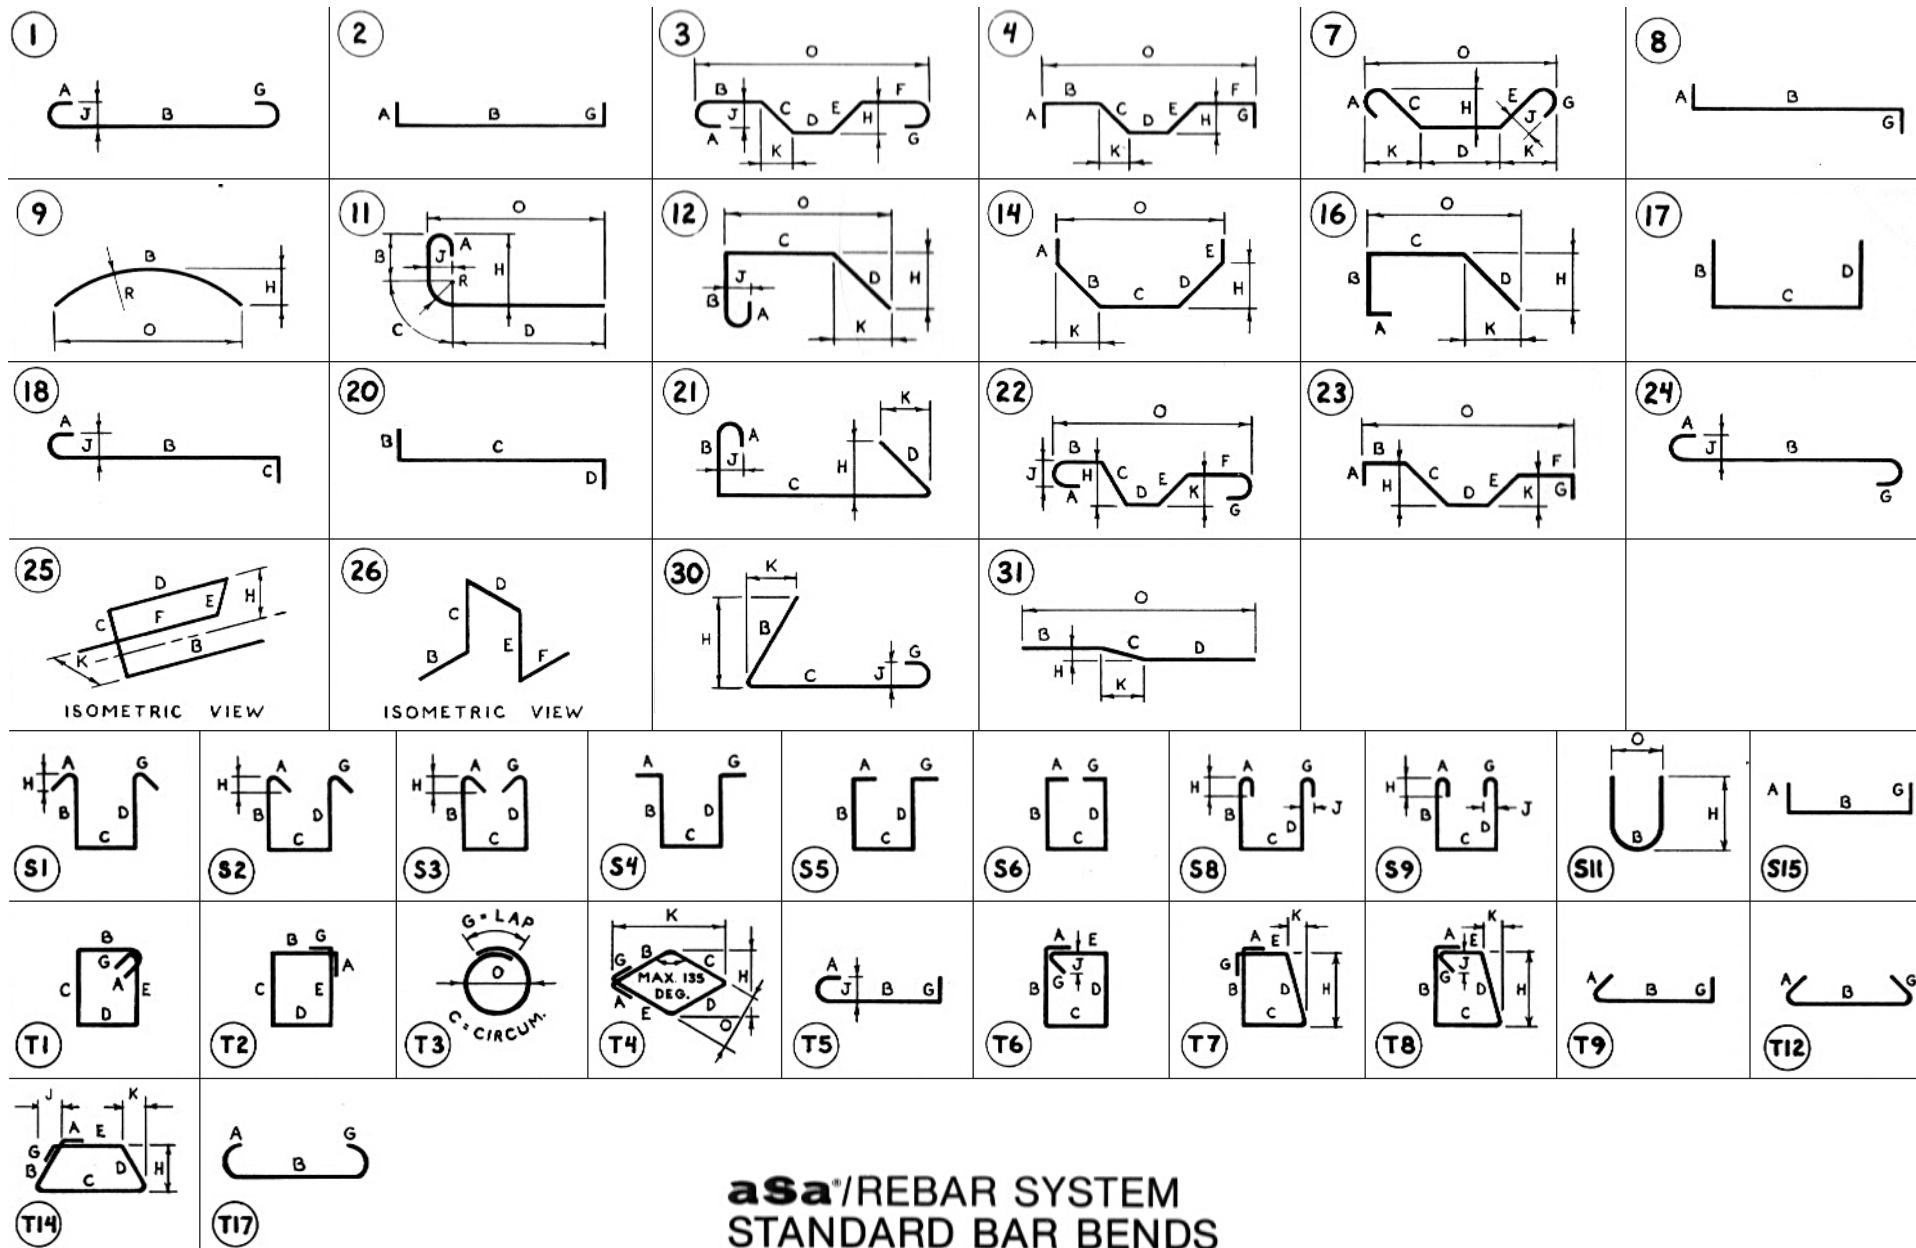

NOTES:

1. aSa Standard Bar Bends include only Types 1-32, T1-T16, and S1-S15.
2. All dimensions are out-to-out of bar except "A" and "G" on standard 180° and 135° hooks.
3. "J" dimension on 180° hooks to be shown only where necessary to restrict hook size, otherwise standard hooks are to be used.
4. Where "J" is not shown, "J" will be kept equal to or less than "H" on truss bars. Where "J" can exceed "H", it should be shown.
5. "H" dimension stirrups to be shown where necessary to fit within concrete.

aSa®/REBAR SYSTEM STANDARD BAR BENDS

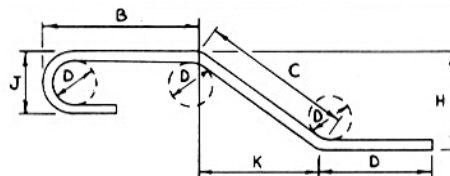

6. Unless otherwise noted, DIAMETER "D" is the same for all bends and hooks on a bar.
7. Where slope differs from 45° dimensions, "H" and "K" must be shown.
8. Where bars are to be bent more accurately than standard bending tolerances, bending dimensions which require closer fabrication should have limits indicated.
9. Figures in circles show types.
10. For recommended diameter "D", of bends, hooks, etc., see CRSI or ACI tables.
11. Type S1-S15, T1-T16 apply to bar sizes #3 through #8.
12. "J" dimension on type T14, T16 is assumed to be equal to "K" if not specified.